



Series	FLA FS SERIES	Warranty	1 Year
Volts	6	Design	902
Cells	3	Plates/Cell	19
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	45 A
Maximum Charge Current	70 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	987
Marine Crank Amps (MCA) 32°F / 0°C	1234
Reserve Capacity (RC @ 25A)	697 Minutes
Reserve Capacity (RC @ 75A)	183 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	461 AH	4.61 A
@ 72 Hour Rate	454 AH	6.30 A
@ 50 Hour Rate	428 AH	8.57 A
@ 20 Hour Rate	360 AH	18.00 A
@ 15 Hour Rate	342 AH	22.80 A
@ 10 Hour Rate	317 AH	31.68 A
@ 8 Hour Rate	310 AH	38.70 A
@ 5 Hour Rate	284 AH	56.88 A
@ 1 Hour Rate	144 AH	144.00 A

Specifications


Weight	46.5 kg	103 lbs
Length	311 mm	12.25"
Width	181 mm	7.13"
Height Incl. Term.	362 mm	14.25"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	44 mm	1.75"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Rope / Plastic Handle	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps


Cycle Life vs. Depth of Discharge

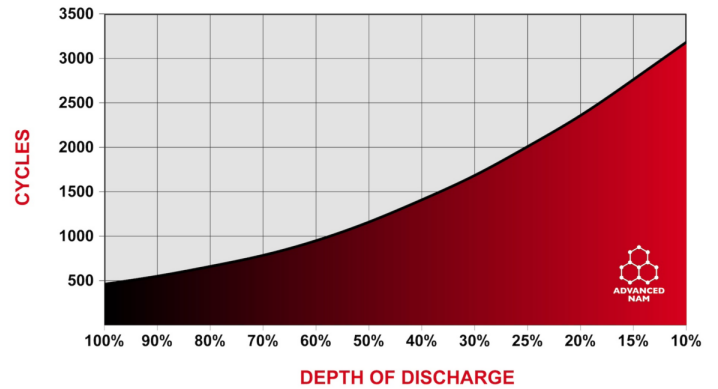

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

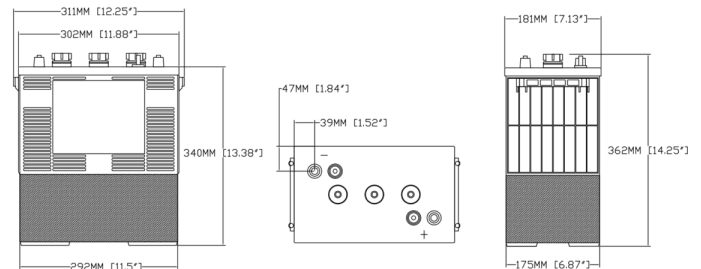

www.multibatt.cl
info@multibatt.cl

+56 9 52067881



Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.



intertek
0122624