

Series	FLA FS SERIES	Warranty	1 Year
Volts	6	Design	GC2
Cells	3	Plates/Cell	19
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

### Charge | Discharge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Recommended Charge Current	30 A
Maximum Charge Current	50 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	703
Marine Crank Amps (MCA) 32°F / 0°C	879
Reserve Capacity (RC @ 25A)	465 Minutes
Reserve Capacity (RC @ 75A)	122 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>307 AH</b>	<b>3.07 A</b>
@ 72 Hour Rate	<b>302 AH</b>	<b>4.20 A</b>
@ 50 Hour Rate	<b>286 AH</b>	<b>5.71 A</b>
@ 20 Hour Rate	<b>240 AH</b>	<b>12.00 A</b>
@ 15 Hour Rate	<b>228 AH</b>	<b>15.20 A</b>
@ 10 Hour Rate	<b>211 AH</b>	<b>21.12 A</b>
@ 8 Hour Rate	<b>206 AH</b>	<b>25.80 A</b>
@ 5 Hour Rate	<b>190 AH</b>	<b>37.92 A</b>
@ 1 Hour Rate	<b>96 AH</b>	<b>96.0 A</b>

### Specifications


Weight	30.0 kg	66.0 lbs
Length	259 mm	10.19"
Width	181 mm	7.13"
Height Incl. Term.	279 mm	11"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Molded Strap Brackets	

- Plastics are UL94 HB (UL94-V2 available)
- Plastics are impact copolymer rated to ASTM D256, D5420
- Vented design with integral flame arrestor vent caps


### Cycle Life vs. Depth of Discharge

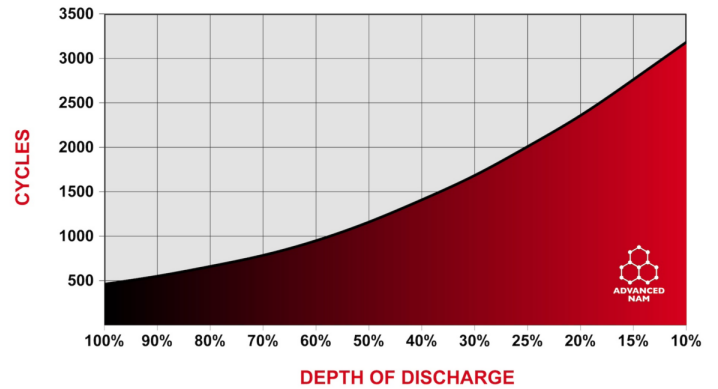

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

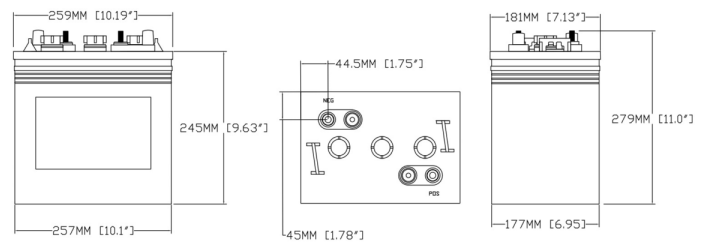

www.multibatt.cl  
info@multibatt.cl

+56 9 52067881



Designed in compliance with applicable BCI, DIN, BS & IEC standards. Tested in compliance to BCI & IEC standards.



intertek  
0122624