



Series	VRLA AGM-S	Warranty	See Warranty Terms
Volts	12	Design	U1
Cells	6		
Terminal Type	F11(M6)		
Size & Thread	M6		

Charge | Discharge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current	6 A
Maximum Charge Current	10 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	9 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	230						
Hour Rate	Capacity / AMP Hour			Current / AMPs			
@ 20 Hour Rate	35 AH			1.75 A			
@ 10 Hour Rate	33 AH			3.3 A			
@ 5 Hour Rate	29 AH			5.8 A			
Cut Off Voltage	Constant Current Discharge						
1.75 VPC	1 hr	2 hr	3 hr	4 hr	5 hr	8 hr	10 hr
	19.8	11.8	8.49	6.68	5.61	3.99	3.39

Specifications


Weight	10 kg	22.5 lbs
Length	195 mm	7.68"
Width	130 mm	5.12"
Height Incl. Term.	168 mm	6.61"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process & battery components.


Container	ABS
Cover	ABS
Handles	Plastic Strap

- Plastics are UL94 HB (UL94 V0 available)
- Valve regulated design with integral flame arrestor
- Non-hazardous, Non-spillable


Cycle Life vs. Depth of Discharge

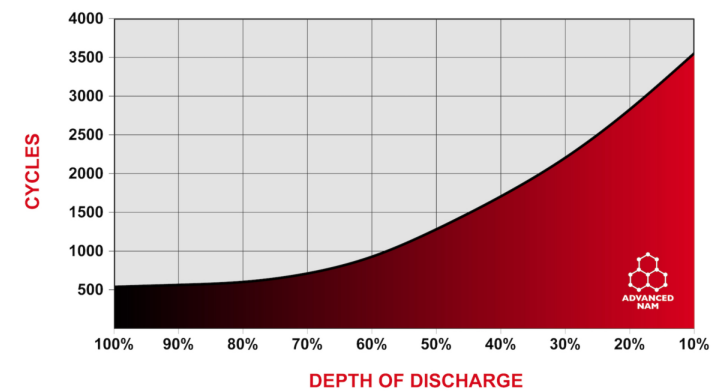

Capacity vs. Temperature

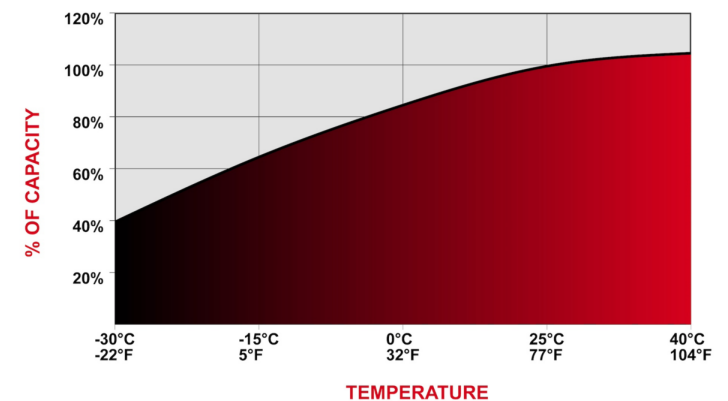

Detailed Illustration

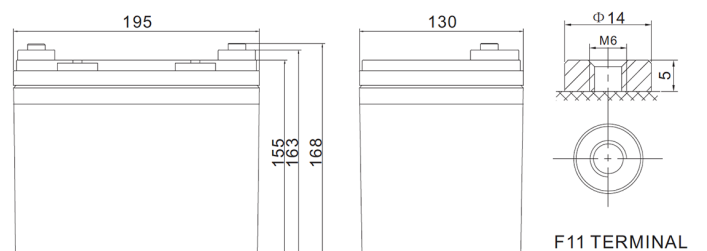

www.multibatt.cl
info@multibatt.cl

+56 9 52067881

